


CH-40

Hydraulic airless machine

Our hydraulic spraying machine (single component) has professional characteristics, is powerful and versatile.

- Maximum product projection capacity.
- Hydraulic system for pump drive.
- No need for compressed air.
- Connect to electrical outlet to work.
- Change direction of the pump with inductive limit switches.
- Vertical product pump.
- Protective casings for added security.
- Product filter at the outlet of the machine.
- Own design and manufacturing.

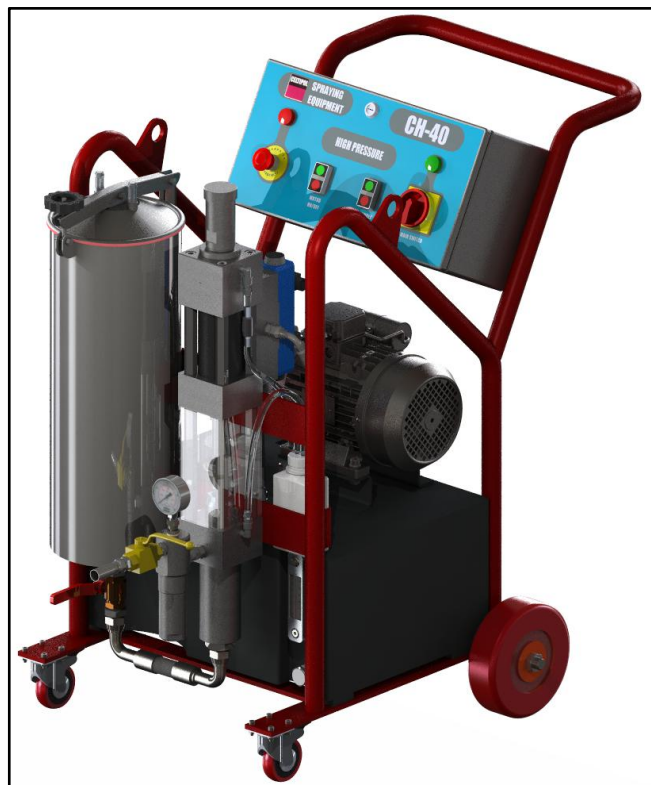

SOLIDWORKS



Security
protections




Pressure
gauges



Made in CE

Model	CH-40
Work pressure	5801 psi (400 bar)
Electrical power supply	220 V, single-phase*
Hose length	up to 328 ft (100 m)
Net weight	220 lb (100 Kg)
Dimensions (width x depth x height)	2.5 x 3.9 x 3.3 ft (760x1200x1020mm)

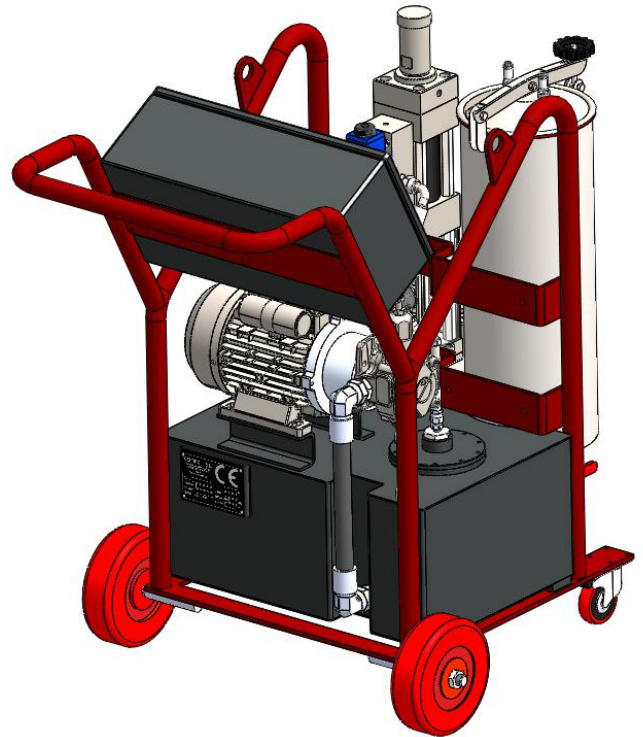

Characteristics

Simple electrical panel.

CE certificate.

Pressure gauge at the outlet.

The pump direction change system is initiated by inductive limit switches and controlled by relays to prevent piston strokes and have a long service life.

All components are easily replaceable and are in stock.

The machine works with a vertical piston pump with ball valves.

* Consult for other configurations.

Optional equipment

Airless spray-gun

Transfer pumps

Electric generators